



Designed. Engineered. Remarkable Value.

Bale Handling Equipment

The quality choice in hay attachments



worksaver.com

Engineered, Designed and Manufactured in the USA



Get more done with a WorkSaver hay attachment.



DBH-449



BSF-1523

3-pt. Bale Spears

WorkSaver has the attachment that is right for your hay handling needs. Our 3-pt. mounted bale spears are designed, depending on model, to handle up to 3,000 lb. bales (DBH-6000 rated at 6,000 lbs.). The line features forged spring steel spears designed for tight center bales allowing easier spear penetration of and withdrawal from bale(s). All models (except BSF-1523) use a 42mm diameter bolt-in spear with a useable length of 42-inches providing outstanding service life. Most models are designed to mount to Category I/II hitches unless noted.



HS-3000



HS-2200

3-pt. Bale Spears

Model	Item No.	Description	Weight
BSF-1523	830235	Rated for round bales up to 1,800 lbs. Tapered main spear has usable length of 44" with welded balance spears. Fits Cat. I/II hitch (7/8" pins).	57 lbs.
HS-2200	832310	Rated for round bales up to 2,200 lbs. Bolt-in forged spear with 42" usable length. Two welded balance spears. Cat. I/II Quick Hitch compatible (7/8" pins).	72 lbs.
HS-3000	830775	Rated at 3,000 lbs. Dual bolt-in forged spears with 42" usable length. Spears are spaced 26" apart allowing bale to be picked up & not lose its orientation. Cat. I/II Quick Hitch compatible (7/8" pins).	105 lbs.
HS-330	832615	Rated at 3,000 lbs. Triple bolt-in forged spears with 26" usable length. Spears are spaced 28-1/2" apart, ideal for mid-size square bales. Overall unit width of 57.75". Fits Cat. II/III hitch & Quick Hitches.	163 lbs.
DBH-449	832610	Rated at 4,000 lbs. Four bolt-in forged spears with 42" usable length. Designed to handle two round bales at once. Overall unit width of 96". Fits Cat. II/III hitch & Quick Hitches.	251 lbs.
DBH-6000	834100	Rated at 6,000 lbs. Four bolt-in spears, square frame design allowing transport of two 5-ft. or 6-ft. dia. round bales at once. Overall unit width of 76". Fits Cat. II/III hitch & Quick Hitches.	295 lbs.



WARNING: Do not exceed weight lifting capacity of your 3-pt. hitch. Damage to equipment or personal injury could occur.



DBH-6000

Choose the **WORKSAVER** Way to Handle Your Hay



Bale Unroller & Handler

Ideal for unrolling large round bales for feeding. Conserves hay – by unrolling only what cattle will eat in one hour. Easy operation from the tractor seat. Allows easy feeding relocation, which reduces manure buildup and spreads seeds. The HHU-2045 fits Cat. I/II hitches, as well as Cat. I or II Quick Hitch.



HHU-2045

Model	Item No.	Description	Weight
HHU-2045	831340	3-pt. Hay Handler/Unroller rated at 2,200 lbs. Designed for round bales either 4' or 5' in width and up to 6' in diameter (requires a 2-1/2" x 8" cylinder and hoses, which are not included).	285 lbs.
Cylinder Kit	832135	Optional Hydraulic Kit-Unroller. Includes 2" x 8" ASAE cylinder, hoses and couplers	24 lbs.




See the Unroller in action on YouTube!
(<https://www.youtube.com/watch?v=2PQQvmo23GI>)



WARNING: Do not exceed weight lifting capacity of your 3-pt. hitch. Damage to equipment or personal injury could occur.

Spears & Spear Kits

Item No.	Description	Weight
831290	1,800 lb. tapered forged Conus II replacement spear with nut. Usable length of 44".	22 lbs.
831273	2,200 lb. tapered forged Conus II replacement spear with nut. Usable length of 44".	22 lbs.
830928	2,200 lb. forged bolt-in replacement spear and bolt. Usable length of 42".	19 lbs.
832217	2,200 lb. bolt-in replacement spear kit. Includes forged spear, sleeve, and bolt. Usable length of 42". Requires 2.28" dia. hole in tubing frame.	26 lbs.
832215	2,200 lb. bolt-in replacement spear kit with cast steel socket (patent pending). Includes forged spear, bolt, and casting that welds to your 3" x 3" or larger square/rectangular frame. Usable length of 42".	29 lbs.
831180	1,800 lb. forged replacement spear kit. Includes spear with nut and weld in sleeve (2" O.D.). Spear length 49" overall, 44" usable.	23 lbs.
831190	2,200 lb. forged replacement spear kit. Includes spear with nut and weld in sleeve (2" O.D.). Spear length 49" overall, 44" usable.	20 lbs.




Spear Kit — Bolt-in
#832215



Spear Kit Conus II Tapered
#831119

Bucket Bale Spears

Quickly convert your front loader bucket into a tool for handling large round bales. Each spear mounts over the bucket cutting edge with heavy angle iron for support and utilizes the bucket underside for leverage. The bolt-on or chain-on system is used to firmly lock the attachment on the bucket. These units use tapered "forged bolt-in spears with a useable length of 42". Our CBSF-3028 triple bale spear is designed to handle rectangular bales.

 **WARNING:** Bale spears are to be inserted into bales. DO NOT use spears as pallet forks, or go under the bale.




CBSF-3028



CBSF-2000

Model	Item No.	Description	Weight
BBSF-20	830185	Bolt-on Bucket Bale Spear for round bales. Rated at 2,000 lbs. Bolt-in spear has usable length of 42". Requires drilling one 17/32" dia. hole in the bucket. Bolt-together design.	65 lbs.
CBSF-2000	830190	Clamp-on Bucket Bale Spear for round bales. Rated at 2,000 lbs. Uses chain & turnbuckle system. Bolt-in spear has usable length of 42". Bolt-together design.	76 lbs.
CBSF-2028	831920	Clamp-on Bucket Dual Bale Spear for round bales. Rated at 3,000 lbs. Uses chain & turnbuckle system. Bolt-in spears have usable length of 42". NOTE: Spears must be inserted into the bale.	102 lbs.
CBSF-3028	831955	Clamp-on bucket triple bale spear for square bales. Rated at 4,000 lbs. uses dual chain & turnbuckles. Bolt-in spears have usable length of 42". NOTE: Spears must be inserted into the bale.	185 lbs.

 **WARNING:** Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.



CBSF-2028



BBSF-20

Choose the **WORKSAVER** Way to Handle Your Hay



FLBS-Series Loader Attachments

The FLBS-Series is designed for use on pin-on type front loaders, they can be paired with a set of optional pin-on or interfacing quick-attach brackets available for most of today's loaders. The FLBS-2200 and FLBS-3000 deliver outstanding hay-handling performance when used to transport round bales. FLBS-6000 is designed to transport two round bales at once, reducing trips across the field.



FLBS-3000



FLBS-2200

Model	Item No.	Description	Weight
FLBS-2200	832380	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Single 1-1/4" diameter balance spear usable length 16". Optional interfacing brackets for most loaders are available.	121 lbs.
FLBS-3000	832385	Dual bolt-in forged spears with usable length of 42". Rated at 3,000 lbs. Optional interfacing brackets for most loaders are available.	136 lbs.
FLBS-6000	834160	Front loader dual bale handler. Transport two round bales at once. Unit is 76" x 24". Rated at 6,000 lbs. Requires loader brackets be welded to the unit.	250 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.


FLBS-Series Loader Attachments

Handling large or mid-size rectangular bales is easier using one of our 3 or 4 spear models to perform the job. All models feature tapered “forged” spring steel spears. Optional pin-on brackets or interfacing brackets for most popular quick-attach front loaders are available. Select models are convertible for use on a 3-pt. hitch with the addition of the optional bolt-on ear assembly (not Quick Hitch adaptable).



FLBS-330/340 –
Shown as FLBS-330

Model	Item No.	Description	Weight
FLBS-330	832390	Triple bolt-in forged spears with usable length of 26". Spears are spaced 26-1/2" apart. Rated at 3,000 lbs. For handling mid-size square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	164 lbs.
FLBS-340	832395	Triple bolt-in forged spears with usable length of 42". Spears are spaced 26-1/2" apart. Rated at 4,000 lbs. For handling larger square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	198 lbs.
FLBS-432	832405	Four bolt-in spears with usable length of 26". Spears are spaced 24" apart. Frame is 79-1/2" wide for handling mid-size square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	169 lbs.
FLBS-449	832410	Four bolt-in forged spears with usable length of 42". Spears are spaced 24" apart. Frame is 79-1/2" wide for handling large square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	212 lbs.
Optional Bolt-in Uprights & Bolt-on Ear Assembly			
	831095	Optional bolt-in uprights for FLBS models 330/340/432/449 to allow handling two bales.	32 lbs.
	831815	Bolt on assembly allows select FLBS models (will not fit FLBS-2200) to be used on a Cat. II 3-pt hitch (requires 830345 standard brackets with 830358 bushing kit to make unit Quick Hitch compatible).	17 lbs.

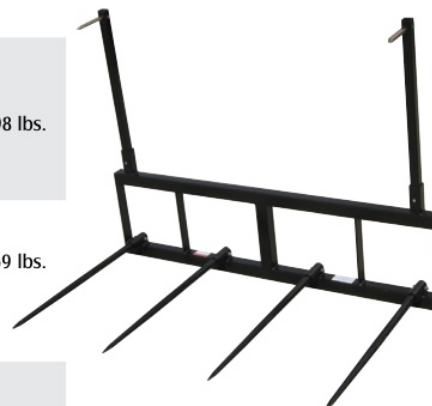

FLBS-449/432 –
Shown as FLBS-449
with optional uprights



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Choose the **WORKSAVER** Way to Handle Your Hay




See the Spinoff in action on YouTube!
(<https://www.youtube.com/watch?v=BqqQJZOS-6Y>)

Model	Item No.	Description	Weight
FSO-906	831000	3-pt. hydraulically driven bale spin off for Cat. II/III size tractors (pin & bushing kit 830295 allows use on Cat. I). Requires 8-10 gpm of hydraulic flow. Tapered forged spear.	250 lbs.
FLSO-907	831020	Front loader mounted hydraulically driven bale spin off. Requires 8-10 gpm of hydraulic flow. Tapered forged spear. Optional pin-on brackets or interfacing brackets for most popular quick-attach front loaders are available with loader arm distance of 54" or less.	288 lbs.
SSSO-908	831030	Skid steer mounted hydraulically driven bale spin off. Requires 8-10 gpm of hydraulic flow. Designed to interface with "Universal" skid steer quick attach system.	325 lbs.

RW Spin Off

Designed as an efficient hay management tool for moving and feeding round bales, the RW Spin Off hydraulically rotates the bale, unwinding the hay into a wind-row. Rotates in both directions for easy feeding and allows the operator to unroll what the cattle will clean up in one hour, eliminating wasted hay. Also, by changing the feeding location each day, the operator can eliminate manure buildup. Available in three models and designed to fit Category II or Category III 3-pt hitches (FSO-906), front loaders (FLSO-907) and skid steers (SSSO-908). All models are hydraulically driven for better operator control, provide easy operation from the cab of tractors or skid steers and feature a forged tapered spear for easier bale penetration. All have usable spear length of 53".

 **WARNING:** Do not exceed weight lifting capacity of your equipment. Damage to equipment or personal injury could occur.



FLSO-907



SSSO-908

Large Bale Squeeze
for Wrapped (or Dry)
Square/Round Bales

Boost productivity when handling wrapped or un-wrapped large square bales (unit also will handle round bales) with a Worksafer bale squeeze. Striking the right balance between clamping force and gentleness these models feature arms made with round tubing to secure the bale without damaging the wrap. Large square bales are the preferred choice of dairies and livestock operators and models are offered to suit their needs. Models are available to fit “universal” skid steer mounts, and Euro/Global mounts. Models feature two hydraulically controlled arms (open/close) to squeeze the bale for transport.



Model	Item No.	Description	Weight
SSBS-48D	834200	Both arms opens, mounts to skid steer loaders & tractor loaders that use “universal” skid steer quick attach. Arms open to handle bales from 48” to 96” in length, up to 2,800 lbs. Hydraulic cylinders included. Shipped with hoses and flat-face couplers.	715 lbs.
GLBS-48D	834210	Both arms opens, mounts to tractor loaders that use Euro/Global quick attach. Arms open to handle bales from 48” to 96” in length, up to 2,800 lbs. Hydraulic cylinders included. Shipped less hoses.	730 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.



Choose the **WORKSAVER** Way to Handle Your Hay



Skid Steer Bale Hand for Wrapped (or Dry) Round Bales

The Skid Steer “Bale Hand” gently handles large round wrapped or unwrapped bales. Features smooth curved arms to prevent wrapped bale puncture when clamping. Fits skid steer and front loaders with the “Universal” quick-attach system.

Model	Item No.	Description	Weight
SSBH-2072	832965	Skid Steer “Bale Hand” designed to handle 4’ to 6’ round bales. Both arms open to clamp bale. Hydraulic cylinder included (less hoses). Rated at 2,200 lbs.	572 lbs.



UBH-2072

UBH-2072 & GLBH-2072 for Wrapped (or Dry) Round Bales

The UBH-2072 & GLBH-2072 will gently handle large round wrapped or unwrapped bales with weight up to 2,200 lbs. They feature smooth curved clamping arms to prevent puncturing wrapped bales. UBH-2072 mates with pin-on brackets or interfacing quick-attach brackets for most popular front loaders. These brackets will fit loaders with a center to center loader arm distance of 54” or less. GLBH-2072 is designed for loaders with the Euro/Global style tool carrier.

Model	Item No.	Description	Weight
UBH-2072	832940	Designed to handle round bales from 4’ to 6’. Both arms open and close to clamp bale. Hydraulic cylinder included (less hoses). Rated at 2,200 lbs.	520 lbs.
GLBH-2072	832980	Designed for Euro/Global tool carriers to handle round bales from 4’ to 6’. Both arms open and close to clamp bale. Hydraulic cylinder included (less hoses). Rated at 2,200 lbs.	555 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

"R" Series
Rotating Bale Hand
for Handling Wrapped
or Unwrapped
Round Bales

The "R" series (UBH-2072R, GBH-2072R, JDBH-2072R and SSBH-2072R) is leading the way in stacking bales. The "R" series allows the operator to pick up a bale rotate it up to 110° and stack it like a soup can for increased versatility. All without having to place the bale down and re-position the clamps. This eliminates double handling, saving the operator time when unloading from a trailer. Optional solenoid kit for power units equipped with single auxiliary valve includes hose & coupler (Item #832379).



See the UBH-2072R in action on YouTube!
(<https://www.youtube.com/watch?v=dhLAa9YyBrl>)

Model	Item No.	Description	Weight
UBH-2072R	832990	Rotating Bale Hand rated at 2,200 lbs. for round bales 4-6-ft. Both arms open to clamp the bale. Includes cylinders (less hoses). Optional interfacing brackets for most loaders are available. Not for 3-pt.	705 lbs.
GLBH-2072R	832985	Rotating Bale Hand for tractor loaders with the Euro/Global quick attach. Rated at 2,200 lbs. for round bales 4-6-ft. Both arms open to clamp the bale. Includes cylinders (less hoses).	735 lbs.
JDBH-2072R	832975	Rotating Bale Hand for JD 400/500 series quick attach systems, rated at 2,200 lbs. for round bales 4-6-ft. Both arms open to clamp the bale. Includes cylinders (less hoses).	740 lbs.
SSBH-2072R	832995	Rotating Bale Hand Skid Steer mount rated at 2,200 lbs. for round bales 4-6-ft. Both arms open to clamp the bale. Includes cylinders (less hoses).	730 lbs.
Optional Solenoid Kit	832379	For power units equipped with single auxiliary valve includes hoses & couplers.	



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Choose the **WORKSAVER** Way to Handle Your Hay




John Deere Style Integrated-Frame Bale Spears

Integrated-frame design engineered to fit select John Deere loaders that utilize the John Deere OEM quick-attach systems. Rugged all welded frame design with durable bolt-in forged spear(s) provides years of dependable service.

**Integrated-frame design for John Deere loader models
that use the hook & pin quick attach system,
300/400/H165/D170/H180 series style carrier & 500 series style carrier.**

Model	Item No.	Description	Weight
JDBS-412	832290	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes.	121 lbs.
JDBS-423	832320	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". Rated at 3,000 lbs.	156 lbs.
JDBS-433	832330	Triple bolt-in forged spears spaced 28" apart, with usable length of 26". Rated at 3,000 lbs.	164 lbs.
JDBS-434	832335	Triple bolt-in forged spears spaced 28" apart, with usable length of 42". Rated at 4,000 lbs.	191 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional bolt-on upright kit for handling two bales. Fits models JDBS-433 & -434.	32 lbs.

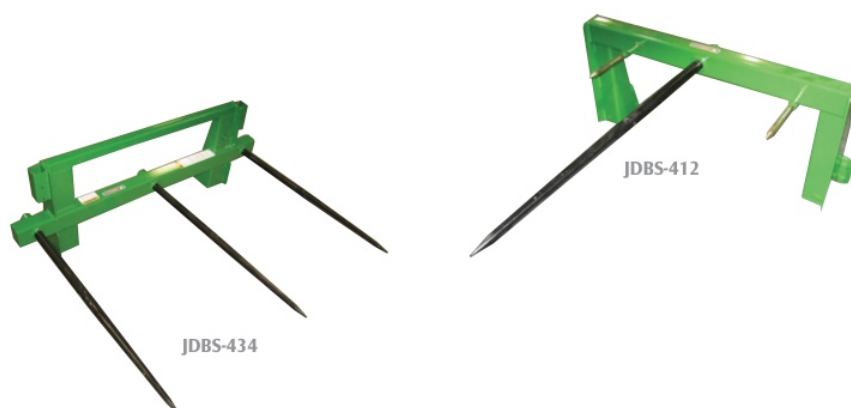


WARNING: Do not exceed weight lifting capacity of your loader.
Damage to equipment or personal injury could occur.


John Deere Style Integrated-Frame Bale Spears

Integrated-frame design for John Deere 600/700 series loaders (Non-Global)
that utilize the 600/700 series style carrier.

Model	Item No.	Description	Weight
JDBS-612	832340	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes.	176 lbs.
JDBS-623	832350	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". Rated at 3,000 lbs.	196 lbs.
JDBS-633	832355	Triple bolt-in forged spears spaced 28" apart, with usable length of 26". Rated at 3,000 lbs.	204 lbs.
JDBS-634	832630	Triple bolt-in forged spears spaced 28" apart, with usable length of 42". Rated at 4,000 lbs.	231 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional bolt-on upright kit for handling two bales. Fits models JDBS-633 & -634.	32 lbs.

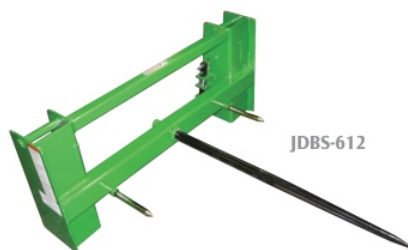

JDBS-612



JDBS-623

JDBS-634
with optional
uprights

WARNING: Do not exceed weight lifting capacity of your loader.
Damage to equipment or personal injury could occur.

Choose the **WORKSAVER** Way to Handle Your Hay



Skid Steer & Front Loader Bale Handling Attachments

Designed for skid steer and tractor front loaders that use the industry standard "universal quick-attach" system. Patented design allows easy access to the skid steer seat with its step through feature. Models are offered for round bales as well as square bales. Forged tapered bolt-in spears allow easy spear penetration of the bale.



SSRB-330 with optional uprights




SSB-3000

Model	Item No.	Description	Weight
SSB-2200	831060	Skid Steer Single Bale Spear. Forged bolt-in spear with usable length of 42". Rated at 2,200 lbs. Two balance spikes.	129 lbs.
SSB-3000	831070	Skid Steer Dual Bale Spear. Forged bolt-in spears spaced 32" apart, with usable length of 42". Rated at 3,000 lbs.	146 lbs.
SSRB-340	831090	Skid Steer Triple Bale Spear. Forged bolt-in spears spaced 26" apart, with usable length of 42". For handling single or double (with optional uprights # 831095) large-size square bales. Rated at 4,000 lbs.	190 lbs.
SSRB-330	831080	Skid Steer Triple Bale Spear. Forged bolt-in spears spaced 26" apart, with usable length of 26". For handling single or double (with optional uprights # 831095) mid-size square bales. Rated at 3,000 lbs.	165 lbs.
Optional Bolt-on Uprights			
	831095	Optional bolt-on uprights for SSRB-330 & SSRB-340 allow handling two bales at once.	32 lbs.



SSRB-340

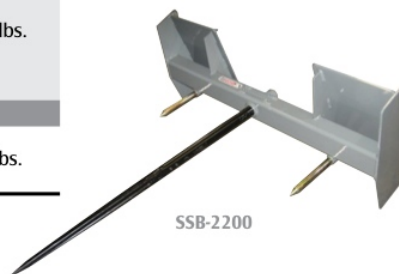

SSB-2200



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Euro/Global Style Integrated Frame Bale Spears

All welded frame design that incorporates the Euro/Global interface. Designed to fit tractor loaders with the widely used Euro/Global tool carrier. Models are offered to handle round bales as well as rectangular bales. All units feature bolt-in forged spears for easy spear penetration of the bale.



ELB-340



ELB-3000



GDBH-6000

Model	Item No.	Description	Weight
GLB-2200	832205	Single bolt-in forged spear with usable length of 42". Two balance spikes. For round bales. Rated at 2,200 lbs.	130 lbs.
GLB-3000	832220	Dual bolt-in forged spears spaced 30" apart, with usable length of 42". For round bales. Rated at 3,000 lbs.	144 lbs.
ELB-3000	832195	Dual bale spear with bolt-in spears mounted in the lower tube for handling round bales. Spears have a useable length of 42". Frame is 41.5" wide and 35.2" high. Rated at 3,000 lbs. Spears must be inserted into the bale, DO NOT USE spears as pallet forks, or go under the bale.	168 lbs.
ELB-330	832365	Triple bolt-in forged spears spaced 26" apart, with usable length of 26". For handling single or double (with optional uprights #831095) mid-size square bales. Rated at 3,000 lbs.	175 lbs.
ELB-340	832370	Triple bolt-in forged spears spaced 26" apart, with usable length of 42". For handling single or double (with optional uprights #831095) large-size square bales. Rated at 4,000 lbs.	200 lbs.
GDBH-6000	834155	Designed to transport two round bales at once. Frame size 76" x 24" with 4 bolt-in spears with 42" useable length. Rated at 6,000 lbs.	265 lbs.
Optional Bolt-on Upright Kit			
	831095	Optional uprights for ELB-330 & -340.	32 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.

Choose the **WORKSAVER** Way to Handle Your Hay



Telehandler Style Integrated-Frame Bale Spears

Integrated-frame bale spears manufactured to mount to select OEM telehandler mounts, for handling round and rectangular bales.



X-642JCBQ



X-642-M

JCB Telehandlers with JCB Q-Fit Quick Attach

For Models JCB 525, 530, 532, 536, 540, 550, 5508, 505-19, 505-22, 506-36, 508-40, 506-23TC, 508-66TC, 509-23STC, 509-45STC, 510-44STC, 510-55STC, 512-26TC, 526-56AGRI, 527-58AGRI, 535-95AGRI, 536-60AGI, 536-60AGRI Plus, 541-70AGRI Plus, 560-80AGRI Plus & old style 520, 525

Model	Item No.	Description	Weight
X-152JCBQ	833580	Single spear bale spear for JCB Q-Fit. Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	319 lbs.
X-242JCBQ	833585	Dual bolt-in forged spears spaced 34" apart, with useable length of 42". Fits JCB Q-Fit Rated at 3,800 lbs. For round bales.	275 lbs.
X-326JCBQ	833590	Triple bolt-in forged spears spaced 26" apart, useable length of 26". Fits JCB Q-Fit Rated at 3,000 lbs. For Mid-size square bales.	272 lbs.
X-342JCBQ	833594	Triple bolt-in forged spears spaced 26" apart, useable length of 42". Fits JCB Q-Fit Rated at 4,000 lbs. For large square bales.	295 lbs.
X-642JCBQ	833595	Transport two 6' diameter bales at once. Frame size 76"x 24" w/ 4-bolt-in spears, useable length 42" fits JCB Q-Fit.	358 lbs.

Manitou Telehandlers with OEM Quick Attach

For Manitou models MLT-625, MLT-634, MLT-840, MLT-960, Also fits Gehl Models CT-516, CT-618, CT-723
Also fits New Holland Models LM-435 (Blue), LM-5040, LM-5050, LM-5060

Model	Item No.	Description	Weight
X-152M	833400	Single spear bale spear for Manitou. Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	259 lbs.
X-242M	833415	Dual bolt-in forged spears spaced 34" apart with useable length of 42". Fits Manitou, Rated at 3,800 lbs. For round bales.	215 lbs.
X-326M	833434	Triple bolt-in forged spears spaced 26" apart, useable length of 26". Fits Manitou Rated at 3,000 lbs. For mid-size square bales.	212 lbs.
X-342M	833430	Triple bolt-in forged spears spaced 26" apart, useable length of 42". Fits Manitou Rated at 4,000 lbs. For large square bales.	235 lbs.
X-642-M	833445	Transport two 6' diameter bales at once Frame size 76"x 24" w/ 4-bolt-in spears, useable length 42" for Manitou.	298 lbs.



WARNING: Do not exceed weight lifting capacity of your loader.
Damage to equipment or personal injury could occur.

Telehandler & Wheel Loader Style Integrated-Frame Bale Spears

John Deere Wheel Loaders

For John Deere Models 244J & 304J with OEM Quick Attach

Model	Item No.	Description	Weight
X-152JDWL	833560	Single spear bale spear for JD Wheel Loaders 244J & 304J Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	274 lbs.
X-242JDWL	833565	Dual bolt-in forged spears spaced 34" apart, with useable length of 42". Fits JD Wheel Loaders 244J & 304J. Rated at 3,800 lbs. For round bales.	230 lbs.
X-326JDWL	833570	Triple bolt-in forged spears spaced 26" apart, useable length of 26". Fits JD Wheel Loader Rated at 3,000 lbs. Mid-size square bales.	227 lbs.
X-342JDWL	833574	Triple bolt-in forged spears spaced 26" apart, useable length of 42". For JD Wheel Loaders 244J & 304J. Rated at 4,000 lbs. For large square bales.	250 lbs.
X-642JDWL	833575	Transport two 6' diameter bales at once Frame size 76" x 24" w/4-bolt-in spears, useable length 42" For JD Wheel Loaders 244J & 304J. Rated at 6,000 lbs.	315 lbs.

Designed for Telehandlers & Wheel Loaders

Manufactured to use "Universal" Skid Steer Style Mount

Model	Item No.	Description	Weight
X-152SS	833410	Single spear bale spear for Telehandler & Wheel Loaders with Skid Steer Mount Single 55 mm spear with useable length of 52-inches for round bales. Rated at 3,000 lbs.	191 lbs.
X-242SS	833425	Dual bolt-in forged spears spaced 34" apart, with useable length of 42". For Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 3,800 lbs. For round bales.	147 lbs.
X-326SS	833440	Triple bolt-in forged spears spaced 26" apart, useable length of 26". For Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 3,000 lbs. Mid-size square bales.	158 lbs.
X-342SS	833444	Triple bolt-in forged spears spaced 26" apart, useable length of 42". Fits Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 4,000 lbs. For large square bales.	179 lbs.
X-642SS	833455	Transport two 6' diameter bales at once Frame size 76" x 24" w/4-bolt-in spears, useable length 42". Fits Telehandlers & Wheel Loaders with Skid Steer Mount Rated at 6,000 lbs.	244 lbs.



WARNING: Do not exceed weight lifting capacity of your loader.
Damage to equipment or personal injury could occur.

Choose the **WORKSAVER** Way to Handle Your Hay



Large Rectangular Bale Carriage

Engineered to handle and stack large rectangular bales either two 4' x 4' x 8' or three 3' x 3' x 8' rectangular bales, rated at 4,400 lbs. Features five bolt in spears with useable length of 40.5" and four balance spear. Frame provides great visibility and measures 79-3/4" wide, 77-7/8" high, center is 46" wide.

RBH-4430SS



See the RBH-4430SS in action on YouTube!
(<https://www.youtube.com/watch?v=8Bwih4LECPs>)

Model	Item No.	Description	Weight
RBH-4410E	833465	Designed for tractor front loaders with Euro/Global QA system.	552 lbs.
RBH-4420M	833470	Designed for Manitou Telehandlers models MLT-625, MLT-634, MLT-840, MLT-960, Gehl CT-516, CT-618, CT-723 New Holland LM 435(Blue), LM 5040, LM 5050, LM 5060	592 lbs.
RBH-4430SS	833475	Designed for Skid Steer & tractor loaders with "universal" skid steer quick-attach system	539 lbs.
RBH-4440JCBQ	833480	Designed for JCB Telehandler with Q-Fit models JCB- 525, 530, 532, 536, 540, 550, 5508, 505-19, 505-22, 506-36, 508-40, 506-23TC, 508-66TC, 509-23STC, 509-45STC, 510-44STC, 510-55STC, 512-26STC, 526-56AGRI, 527-58AGRI, 535-95AGRI, 536-60AGRIPlus, 541-70AGRI Plus, 560-80AGRI Plus,	653 lbs.
RBH-4450JDWL	833465	Designed for John Deere Wheel Loader Models 244J 304J	552 lbs.



WARNING: Do not exceed weight lifting capacity of your loader.
Damage to equipment or personal injury could occur.



Choose the **WORKSAVER** Way to Handle Your Hay

About Worksaver

With a history dating back to the 1950s, today, Worksaver continues on a path of growth and innovation aided by the latest in computer designed products and components, increased manufacturing efficiencies and a commitment to quality.

With CNC machining centers, fiber laser shape cutting, robotic welders and polyurethane paint you can be assured that we will consistently deliver high quality industry-leading products that elevate your productivity.

Our Midwest location offers us the ability to service all areas of the country easily. With a skilled work force that shares the same values as our customers. They share in your passion for well-made quality products.

Our #1 goal is to provide our customers with products they are proud to own and help them get more done.

**Worksafer,
The Logical Choice
in Equipment.**



Caution — A heavy load can cause your tractor to tip over. When moving heavy loads, keep the load as close to the ground as possible, go slowly around turns, and be sure the front or rear of tractor is properly counterbalanced with weights.

Caution — Operators must read & understand operator's manual, particularly the safety warnings and instructions. **The operator is responsible for safety of themselves and others when operating equipment.**



WORKSAVER, INC. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice. WORKSAVER, INC. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.



Distributed by:



Worksafer, Inc.

P.O. Box 100, Litchfield, IL 62056-0100

Phone: 217-324-5973 • Fax: 217-324-3356

worksaver.com • E-mail: sales@worksaver.com

Designed. Engineered. Remarkable Value.



Form No. 100-10245

© 2021 Worksaver, Inc.

Printed in U.S.A.