



**Weasler®**

# Standard Drive Shaft

**Higher value. Smarter solutions.**



**Transfer the right amount of power when and where you need it.**



When you have occasional equipment projects that only require up to 80hp, choose the Standard Drive Shaft. Perfect for applications such as rotary cutters, fertilizer spreaders, tillers and more, the Standard PTO is the perfect ready-to-install solution.




Scan to learn more.

Part#	Description	Series	Tractor Yoke	Implement Yoke	Compressed	Max Extended
14006127ST	Fertilizer Spreader	1 Series	1-3/8 6 Spl SSL	1-3/8 6 Spl SSL	27"	37"
14006340ST	Finish Mower / Rotary Cutter	3 Series	1-3/8 6 Spl SSL	1-3/8 6 Spl SSL	40"	57"
14006430ST	Finishing Mower & Rotary Cutter	4 Series	1-3/8 6 Spl SSL	1-3/8 Rd w/Pinhole	30"	40"
14006432ST	4-ft. Rotary Cutter	4 Series	1-3/8 6 Spl SSL	1-3/8 Rd w/Pinhole	32"	43"
14006437ST	5-ft. Rotary Cutter	4 Series	1-3/8 6 Spl SSL	1-3/8 Rd w/Pinhole	37"	50"
14006442ST	6-ft. Rotary Cutter	4 Series	1-3/8 6 Spl SSL	1-3/8 Rd w/Pinhole	42"	60"
14006448ST	All Purpose Driveline	4 Series	1-3/8 6 Spl SSL	1-3/8 6 Spl SSL	48"	70"
14006453ST	Post Hole Digger	4 Series	1-3/8 6 Spl SSL	1-1/4 Rd w/Pinhole	53"	79"
14006542ST	6-ft. Lift Cutter HD	5 Series	1-3/8 6 Spl SSL	1-3/8 Rd w/Pinhole	42"	60"
14006546ST	Heavy Duty Rotary Cutter	5 Series	1-3/8 6 Spl SSL	1-3/8 6 Spl SSL	46"	67"
14006657ST	All Purpose Driveline	6 Series	1-3/8 6 Spl SSL	1-3/8 6 Spl SSL	57"	83"
14106436ST	Pull-Type Cutter/Tiller	4 Series	1-3/8 6 Spl SSL	1-3/8 6 Spl w/ Friction Clutch	36"	48"
14106558ST	JD MX Cutter 5', 6', 7'	5 Series	1-3/8 6 Spl SSL	1-3/8 21 Spl w/ Friction Clutch	58"	85"

# Driveline Length Adjustment

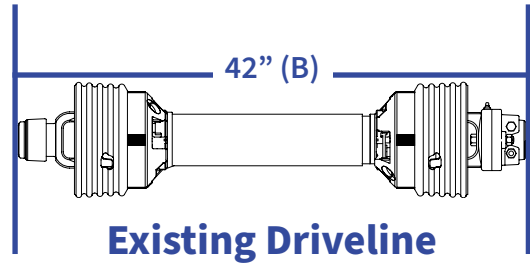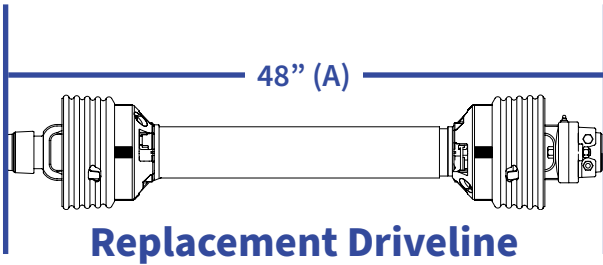

1 Remove guard from driveline. Separate driveline halves. Shorten guard halves (Pic. 1) and profile tube halves (Pic. 2) same as existing driveline halves or see example below.



3 Round off all sharp edges and remove burrs.



4 Grease sliding profiles.



5 Reassemble guard halves. Both profile tubes should extend 40-mm (1.58") beyond the end of the guard tubes.



6 Reassemble driveline halves together making sure they slide (telescope) easily and ensure guards rotate freely on yokes.

**EXAMPLE:** If overall replacement driveline length dimension is 48" (See A), and your existing overall driveline length dimension is 42" (See B), the amount to shorten EACH driveline half would be 6". Your driveline is now ready to reassemble and use.

**Pictured:  
Weasler Part# 14106436ST**



Weasler Part #	Manufacturer	Model #
<b>#14106436ST</b>	Behlen	80118040YEL, 80118030ORG, 80118050YEL, 80118060YEL
<b>#14106436ST</b>	Bush Hog	RT60G, RT60GR, RT72G, RT72GR, RT84G, RT84GR, RTM Series, RTN Series, RTS Series
<b>#14106436ST</b>	Howse	RTC48, UL48, RTC62, UM60, RTC70, UM72, RTR85, UH84
<b>#14106436ST</b>	John Deere	TG-48, TH-60Y, TG-72Y
<b>#14106436ST</b>	King Kutter	TG-48, TG-48-XB, TG-G-48, TG-54-XBX, TG-60, RTG-60, TG-G-60, TG-72, RTG-72, TG-G-72, TG-84, TG-G-84
<b>#14106546</b>	Landpride	25-34-50
<b>#14106436ST</b>	Tarter	RTC48, UL48, RT205BL, RT206BL, RT207BL

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR code for Cut-To-Length instructional video.



# Fertilizer Spreader



**Pictured:  
Weasler Part# 14006127ST**



Weasler Part #	Manufacturer	Model #
#14006127ST	Behlen	80112751, 80112701
#14006127ST	Bush Hog	FSP-500, FSP-800
#14006127ST	Howse	FS761C
#14006127ST	King Kutter	S-400-P, S-XB, S-500
#14006127ST	Kuhn	Several Models
#14006127ST	Landpride	FS1000, FS500, FS700
#14006127ST	Lely	Several Models
#14006127ST	Rhino	Several Models
#14006127ST	Sitrix	Several Models
#14006127ST	Tarter	P1, P250, P300, P400, P500, PFS-480, PFS-770, FS-480, FS-770

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR code for Cut-To-Length instructional video.



**Pictured:  
Weasler Part# 14006448ST**



Weasler Part #	Manufacturer	Model #
<b>#14006448ST</b>	Bush Hog	ATH600, ATH900, ATH720, EFM480, EFM600, FTH600, FTH720, RDTH60, RDTH72, MTH600, MTH720, FTH480, TM4 RM-2, TM5 RM-2, TM6 RM-2
<b>#14006448ST</b>	Howse	C360, C372
<b>#14006430ST</b>	King Kutter	RFM-48, RFM-48-XB
<b>#14006432ST</b>	King Kutter	RFM-60
<b>#14006437ST</b>	King Kutter	RFM-72, RFSM-72
<b>#14006442ST</b>	King Kutter	RSFM-SS-84-FH
<b>#14006448ST</b>	Kubota	BL34A, B342A
<b>#14006448ST</b>	Landpride	AT2660, AT2672, FDR1548, FDR1560, FDR1572, FDR1648, FDR1660, FDR1672, FDR2548, FDR2560, FDR2572,
<b>#14006455</b>	Landpride	AT2560, AT2572, FD2560, FD2572, FD1548, FD1560, FD2548
<b>#14006657ST</b>	Landpride	FDR3590
<b>#14006432ST</b>	Tarter	FM205BL
<b>#14006437ST</b>	Tarter	FM206BL

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR Code for instructional video

# Rotary Cutter



**Pictured: Weasler Part#  
14006437ST**



Weasler Part #	Manufacturer	Model #
#14126664	Alamo	AG60B, AG72B, A60B, A72B
#14106660	Alamo	RX60, RX72
#14006437ST	Behlen	80110040YEL, 80110030ORG, 80110050YEL
#14006442ST	Behlen	80110050YEL, 80110060YEL
#14006542ST	Behlen	80110080YEL
#14006437ST	Bush Hog	SQ142, SQ148, SQ420, SQ480, RZ60, RZ160
#14006448ST	Bush Hog	SQ60
#14106546	Bush Hog	SQ7, SQ72, SQ84, 12, 305, 306, 275, 285
#14106654	Bush Hog	276, 277, 278, 287
#14106661	Bush Hog	12710, 12715
#14006437ST	Howse	300C, 350C, 350
#14006442ST	Howse	400C, 500C, 400, 500
#14126654	Howse	C808, C606NC, C505
#14106660	Howse	HD10AC, HD10A, CRB842C, CRB842, CRB72, CRB60, CR808HN
#14006652	Howse	601S, 601SC
#14106546	John Deere	603, 613, 616, 717

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.

# Rotary Cutter (continued)



Weasler Part #	Manufacturer	Model #
#14106558ST	John Deere	MX5, MX6, MX7, 609, 709
#14006430ST	King Kutter	L-40-40-P
#14006432ST	King Kutter	L-48-40-P
#14006437ST	King Kutter	L-60-60-P, L-40-40-XB, L-60-40-XBX
#14006442ST	King Kutter	L-72-40-P, L-72-40-P6
#14006542ST	King Kutter	L-72-60-P
#14106436ST	King Kutter	L-60-40-SC, L-60-60-SC
#14106546	King Kutter	L-72-40-SC, L-72-60-SC-P6, L-72-60-SC, L-72-40-SC-P6, L-72-60-HD, L-72-80-HD, L60-HD, P72 HD, P60-40-P
# 14006437ST	Kodiak	ST40, ST48
# 14006451	Kodiak	ST60, ST72
# 14106546	Kodiak	MD-60
# 14106654	Kodiak	HD72, HD72-2, HD84-2
#14006448ST	Kubota	BL348A, B342A
#14106546	Kubota	LM378, L360, L366
#14006437ST	Landpride	RCR1542, RCR1548, RCR1560
#14006451	Landpride	RCR1572
#14006448ST	Massey Ferguson	1051
#14006437ST	Rhino	SE4, SE5
#14106546	Rhino	CY60, CY72
#14106660	Rhino	TW60, TW72, 260, 272
# 14106654	Rhino	SE7, SE6
#14006430ST	Tarter	FM5
#14006432ST	Tarter	RC4, RCSC4, RBRC402
#14006437ST	Tarter	RC5, RBRC502, FM5
#14006442ST	Tarter	RC6, RBRC602, FM6
# 14006432ST	Woods	BB48, BB48E
# 14006442ST	Woods	BB60, BB60E
#14106546	Woods	600, 72, 80

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR code for Cut-To-Length instructional video.



# Disc Mower



**Pictured:  
Weasler Part# 14307645**



Weasler Part #	Manufacturer	Model #
#14307645	Agriquip	CM245, CM270
#14307645	Claas	Corto 240D, Corto 280D
#14307645	Bush Hog	DM7, DM70, DM8, DM80, DM9, DM90
#14307645	Fahr	SM2.21, SM2.24, SM240
#14307645	Ford New Holland	442, 452, 462, 463
#14307645	Fort	F25/5, F25/6, F25/7
#14307645	Gehl	1162, 1165
#14307645	John Deere	R240, R280, R310, 240, 260, 265

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR code for Cut-To-Length instructional video.

# Manure Spreader



**Pictured:  
Weasler Part# 14006657ST**



Weasler Part #	Manufacturer	Model #
#14006448ST	Kuhn	1030TR, 1040TR, 1130, 1140, 1150,
#14006657ST	Kuhn	1212TR, 1215TR, 1219TR, 1224TR, 1230TR

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR code for Cut-To-Length instructional video.

# Post Hole Digger



**Pictured:  
Weasler Part# 14006453ST**



Weasler Part #	Manufacturer	Model #
#14006453ST	Behlen	80113000YEL
#14006453ST	Bush Hog	2101, 2102, 2103
#14006453ST	Howse	PHD25, PHD45, PHD75
#14006453ST	Landpride	PD15, PD25, PD35
#14006453ST	Rhino	HPHD, RPHD, SPHD

**NOTE:** Before installing verify correct end yoke and overall driveline fitment. It may be necessary to cut the driveline to length to fit your specific application. Verify the length by ensuring that sufficient overlap of the profile tubes exists in all working positions without the possibility of bottoming out. Safety decals must remain intact if driveline has been modified.



Scan QR code for Cut-To-Length instructional video.